



# CAINTON

Change is a perpetual motion

## Micro/Slim Fan & Blower

---

- Code Rule - p.1
- DC Axial Fan - pp. 2 - 28
- DC Blower - pp. 29 - 78

## Code Rule

Fan Type	Fan imension (mm)		Voltage	Speed	Bearing	Connection	Function	Mold Model	IP Level
AXD: DC Axial Fan	Length	Thickness	V12: 12VDC	HX: Higher than Extreme	B: Ball Type	C: Connector	N1: FG	-Mold Model	-IP Level
BLD: DC Blower			V24: 24VDC	XH: Extremely High			N2: RD		
			V48: 48VDC	HH: Much Higher			N3: PWM		
			FV: Full Voltage	HR: Higher			N4: Voltage Control		
				H: High			N5: FG+PWM		
				M: Medium			N6: RD+PWM		
				L: Low			N7: FG+VC		
				LR: Lower			N8: RD+VC		
				LW: Much Lower					
				XL: Extremely Low					
				LX: Lower than Extreme					

## DC Axial Fan

15x15x4mm

- Housing: Plastic (Flammability:UL94V-0)
- Impeller: Plastic (Flammability:UL94V-0)
- Bearing: Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD1504V3M-K	3.3	0.02	0.066	15000	0.08	0.002	1	0.04	24.7
AXD1504V5H-K	5	0.03	0.15	20000	0.12	0.003	2	0.08	32.2

## DC Axial Fan


15x15x4mm

- Dimension:

Unit: mm

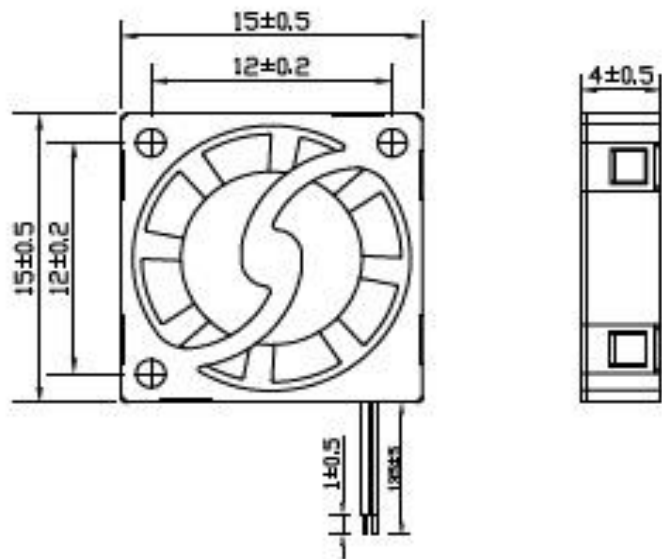

- Performance:

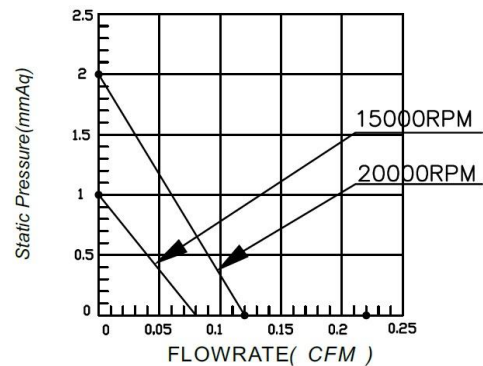

## DC Axial Fan

17x17x3mm

- Housing: Plastic (Flammability:UL94V-0)
- Impeller: Plastic (Flammability:UL94V-0)
- Bearing: HDB
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD1703V3H-PH	3	0.25	0.75	19000	0.41	0.012	19.19	0.756	39.96

## DC Axial Fan


17x17x3mm

- Dimension:

Unit: mm

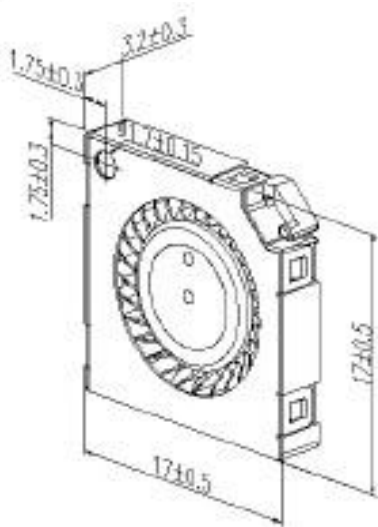

- Performance:

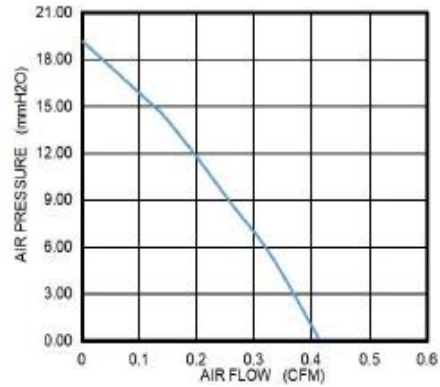

## DC Axial Fan

17x17x3mm - B Type

- Housing: Plastic (Flammability:UL94V-0)
- Impeller: Plastic (Flammability:UL94V-0)
- Bearing: HDB
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD1704V3H-PH2	3	0.25	0.75	26000	1.55	0.044	9.79	0.385	46.28

## DC Axial Fan


17x17x3mm - B Type

- Dimension:

Unit: mm

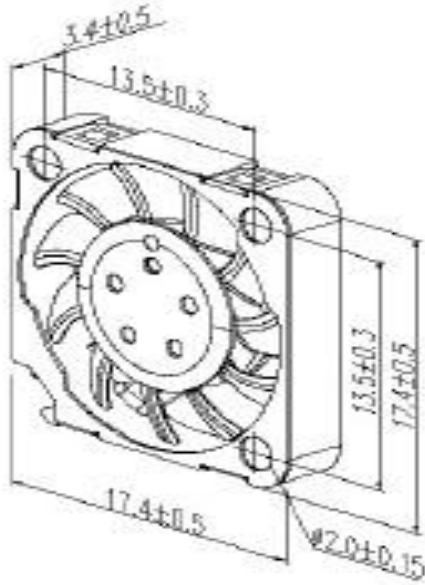

- Performance:

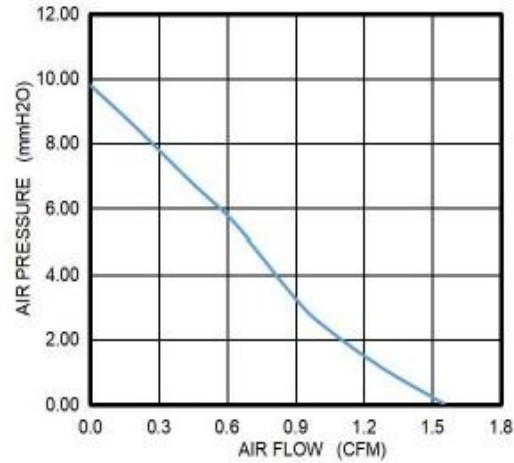



## DC Axial Fan

18x14x3mm

- Housing: Plastic (Flammability:UL94V-0)
- Impeller: Plastic (Flammability:UL94V-0)
- Bearing: HDB
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD1803V3H-PH	3	0.08	0.24	14000	0.079	0.002	1.64	0.065	25.69

## DC Axial Fan

18x14x3mm


- Dimension:

Unit: mm

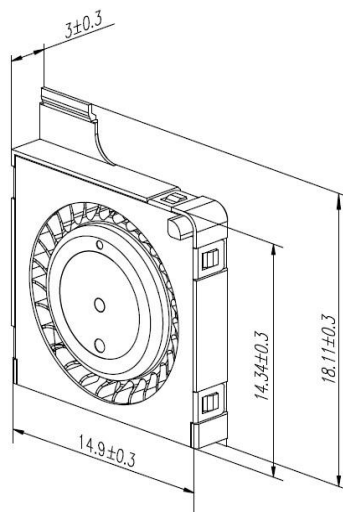

Unit: mm

- Performance:

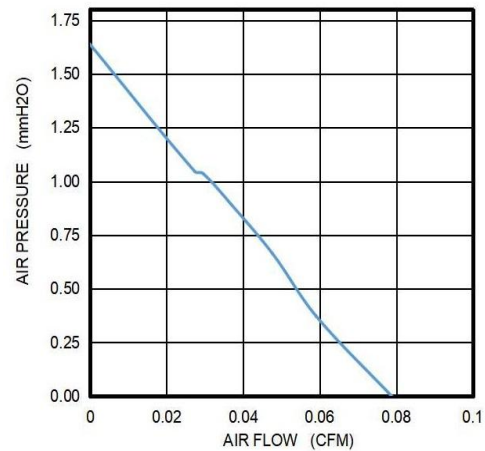

## DC Axial Fan

18x18x4mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD1804V3M-K	3.3	0.022	0.066	11000	0.13	0.0037	1	0.04	23.4
AXD1804V5M-K	5	0.033	0.13	15000	0.22	0.0062	3	0.12	31.6

## DC Axial Fan


18x18x4mm

- Dimension:

Unit: mm

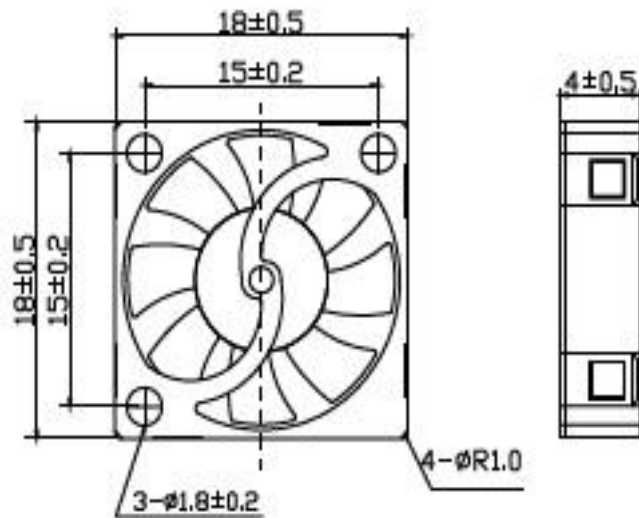

- Performance:

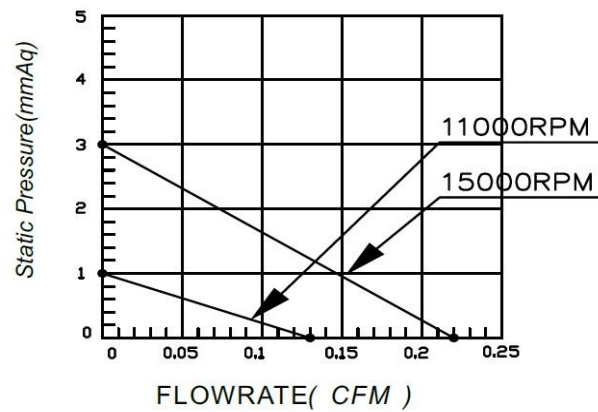

## DC Axial Fan

20x20x3mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HDB
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD2003V3H-PH	3	0.25	0.75	17800	0.56	0.016	20.16	0.794	36.6

## DC Axial Fan


20x20x3mm

- Dimension:

Unit: mm

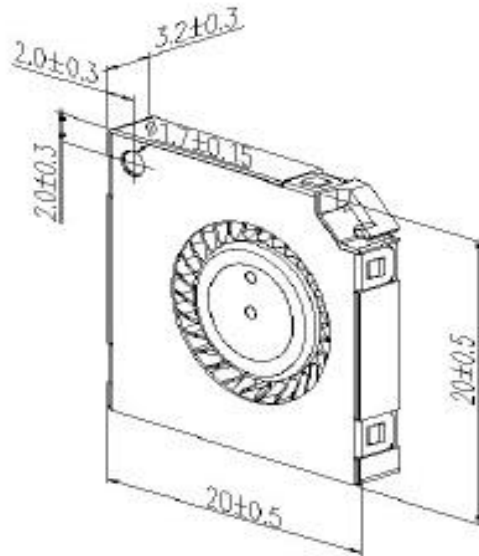

- Performance:

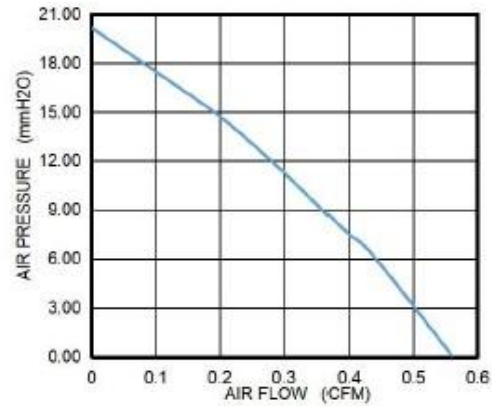

## DC Axial Fan

20x20x6mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD2006V5L-K	5	0.08	0.4	8000	0.79	0.022	1.95	0.077	21.5
AXD2006V5M-K	5	0.12	0.6	10000	0.95	0.027	2.22	0.087	25.6
AXD2006V5H-K	5	0.16	0.8	12000	1.12	0.032	2.69	0.106	31.2
AXD2006V12L-K	12	0.04	0.48	8000	0.79	0.022	1.95	0.077	21.5
AXD2006V12M-K	12	0.06	0.72	10000	0.95	0.027	2.22	0.087	25.6
AXD2006V12H-K	12	0.1	1.2	12000	1.12	0.032	2.69	0.106	31.2

# DC Axial Fan


20x20x6mm

- Dimension:

Unit: mm

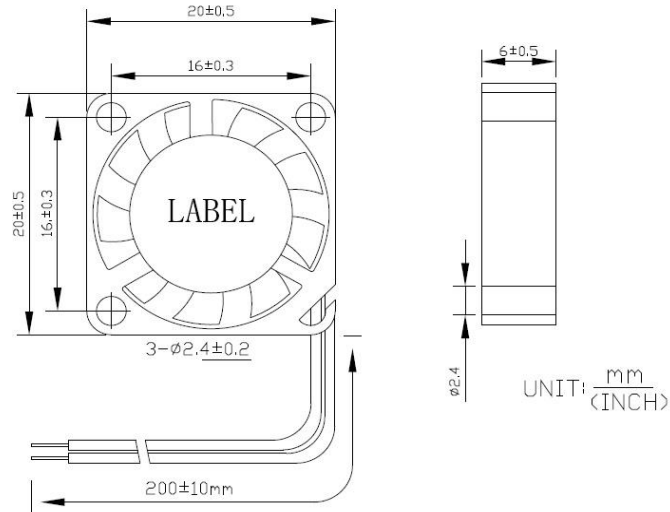

- Performance:

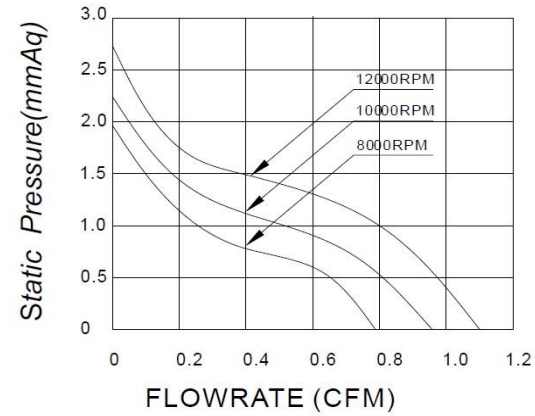



## DC Axial Fan

20x20x6mm - B Type

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HDB
- Certification: CE, RoHS
- Additional functions are optional



Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD2006V5H-PH	5	0.2	1	18000	1.73	0.048	9.05	0.356	40.8


## DC Axial Fan

20x20x6mm - B

Type


- Dimension:

Unit: mm

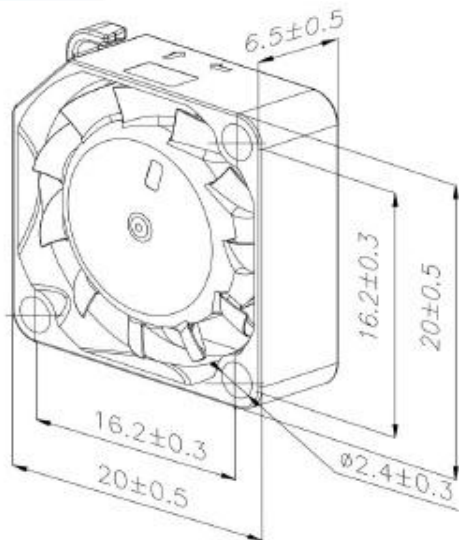

Unit: mm

- Performance:

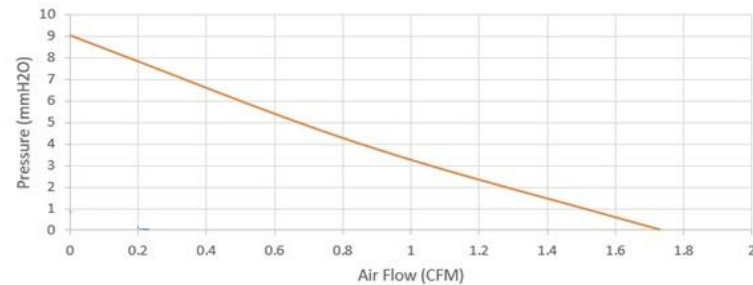

## DC Axial Fan

25x25x07mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Ball, Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD2507V5L-K	5	0.14	0.72	7000	1.22	0.035	2.16	0.085	19.6
AXD2507V5M-K	5	0.17	0.84	10000	1.55	0.044	3.1	0.122	23.5
AXD2507V5H-K	5	0.19	0.96	14000	1.9	0.054	3.8	0.15	26.4
AXD2507V5HR-K	5	0.22	1.08	17000	2.81	0.08	4.5	0.177	31.2
AXD2507V12L-K	12	0.06	0.72	7000	1.22	0.035	2.16	0.085	19.6
AXD2507V12M-K	12	0.07	0.84	10000	1.55	0.044	3.1	0.122	23.5
AXD2507V12H-K	12	0.08	0.96	14000	1.9	0.054	3.8	0.15	26.4
AXD2507V12HR-K	12	0.09	1.08	17000	2.81	0.08	4.5	0.177	31.2

## DC Axial Fan


25x25x07mm

- Dimension:

Unit: mm

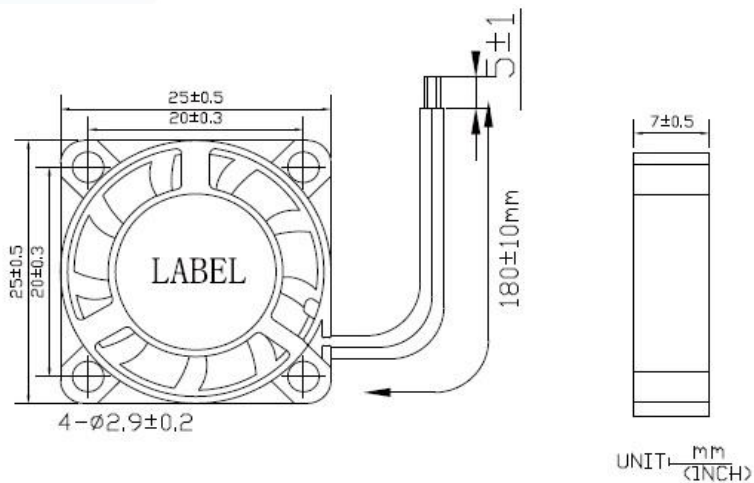

- Performance:

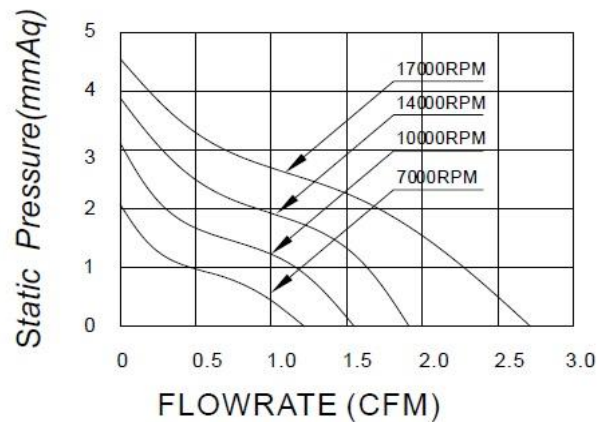

## DC Axial Fan

30x30x3mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HDB
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD3003V5L-PH	5	0.1	0.5	9500	0.69	0.019	8.78	0.342	34.1
AXD3003V5M-PH	5	0.15	0.75	12500	0.96	0.027	16.18	0.631	41.4
AXD3003V5H-PH	5	0.25	1.25	15500	1.24	0.035	28.96	1.129	47.8

## DC Axial Fan


30x30x3mm

- Dimension:

Unit: mm

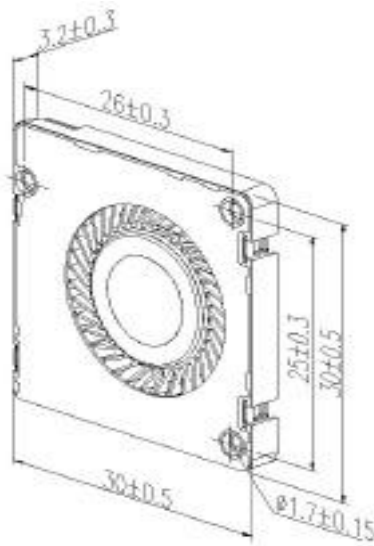

- Performance:

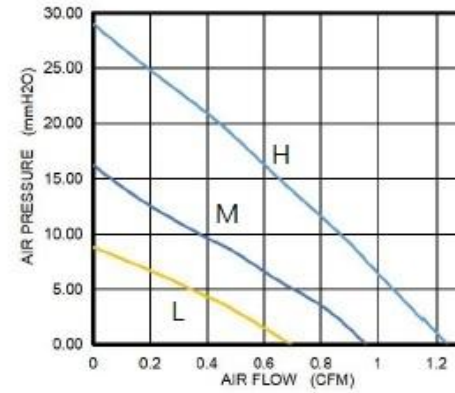

## DC Axial Fan

30x30x4mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HDB
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD3004V5L-PH	5	0.1	0.5	9500	0.76	0.021	8.8	0.343	31.3
AXD3004V5M-PH	5	0.15	0.75	12500	0.96	0.027	16.9	0.659	41.3
AXD3004V5H-PH	5	0.25	1.25	15400	1.28	0.036	26.7	1.041	47.3

## DC Axial Fan


30x30x4mm

- Dimension:

Unit: mm

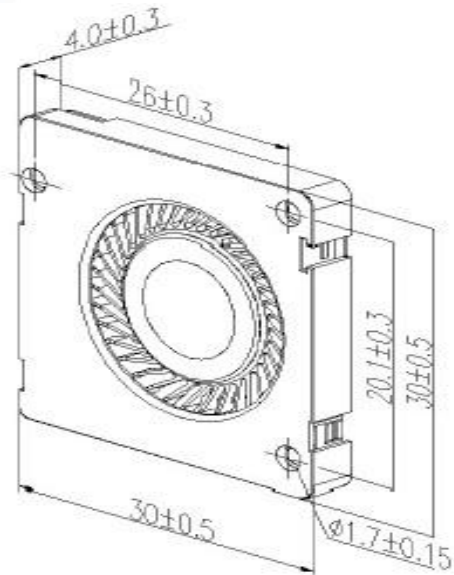

- Performance:

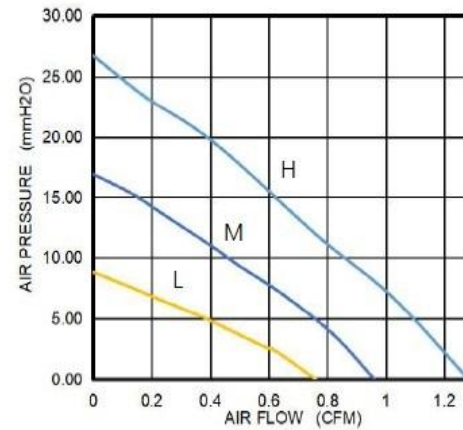



## DC Axial Fan

30x30x7mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Ball, Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD3007V5L-K	5	0.14	0.72	6000	1.99	0.056	1.71	0.067	25.5
AXD3007V5M-K	5	0.17	0.84	8000	2.66	0.075	2.7	0.106	27.4
AXD3007V5H-K	5	0.19	0.96	10000	3.46	0.098	4.13	0.163	30.1
AXD3007V5HR-K	5	0.22	1.08	11000	3.78	0.11	4.94	0.194	32
AXD3007V5HH-K	5	0.24	1.2	13000	4.25	0.12	8.25	0.325	34.9
AXD3007V12L-K	12	0.06	0.72	6000	1.99	0.056	1.71	0.067	25.5
AXD3007V12M-K	12	0.07	0.84	8000	2.66	0.075	2.7	0.106	27.4
AXD3007V12H-K	12	0.08	0.96	10000	3.46	0.098	4.13	0.163	30.1
AXD3007V12HR-K	12	0.09	1.08	11000	3.78	0.11	4.94	0.194	32
AXD3007V12HH-K	12	0.1	1.2	13000	4.25	0.12	8.25	0.325	34.9

# DC Axial Fan


30x30x7mm

- Dimension:

Unit: mm

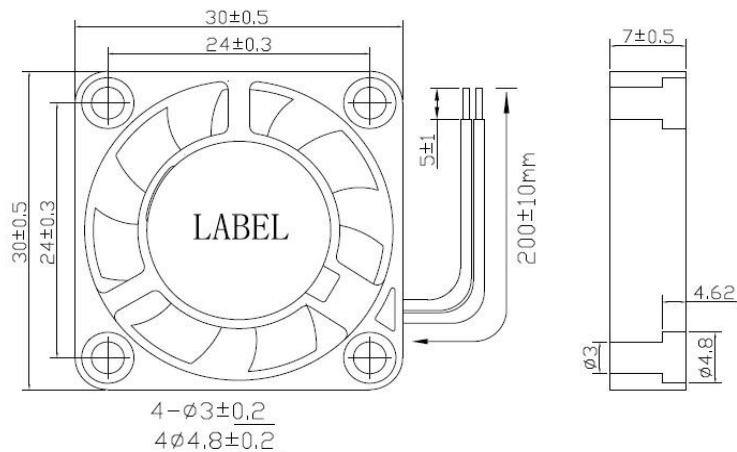

- Performance:

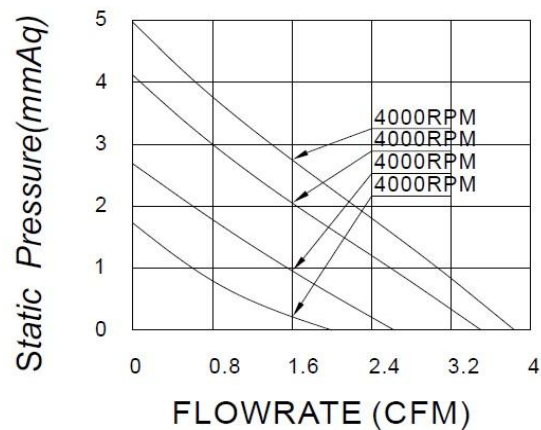

## DC Axial Fan

40x40x7mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Ball, Sleeve
- Certification: CE, RoHS
- Additional functions are optional



Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD4007V5LW-K	5	0.12	0.6	4500	3.14	0.089	0.84	0.033	23.5
AXD4007V5LR-K	5	0.144	0.72	5000	3.67	0.104	1.17	0.046	24.5
AXD4007V5L-K	5	0.168	0.84	5500	3.96	0.113	1.4	0.055	25.6
AXD4007V5M-K	5	0.192	0.96	6000	4.6	0.131	1.65	0.065	27.5
AXD4007V5H-K	5	0.2	1.02	6500	5.06	0.144	2.02	0.079	29.3
AXD4007V5HR-K	5	0.216	1.08	7000	5.31	0.151	2.17	0.085	30.4
AXD4007V5HH-K	5	0.24	1.2	7500	5.37	0.153	2.4	0.094	31.5

## DC Axial Fan

40x40x7mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Ball, Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
AXD4007V12LW-K	12	0.05	0.6	4500	3.14	0.089	0.84	0.033	23.5
AXD4007V12LR-K	12	0.06	0.72	5000	3.67	0.104	1.17	0.046	24.5
AXD4007V12L-K	12	0.07	0.84	5500	3.96	0.113	1.4	0.055	25.6
AXD4007V12M-K	12	0.08	0.96	6000	4.6	0.131	1.65	0.065	27.5
AXD4007V12H-K	12	0.085	1.02	6500	5.06	0.144	2.02	0.079	29.3
AXD4007V12HR-K	12	0.09	1.08	7000	5.31	0.151	2.17	0.085	30.4
AXD4007V12HH-K	12	0.1	1.2	7500	5.37	0.153	2.4	0.094	31.5

## DC Axial Fan


40x40x7mm

- Dimension:

Unit: mm

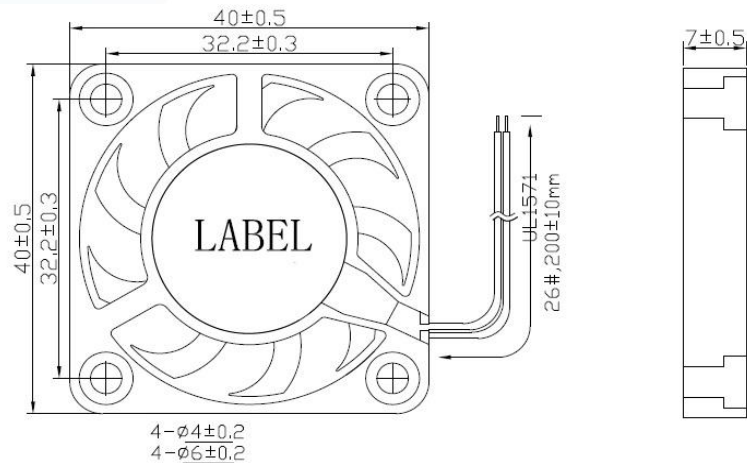

- Performance:

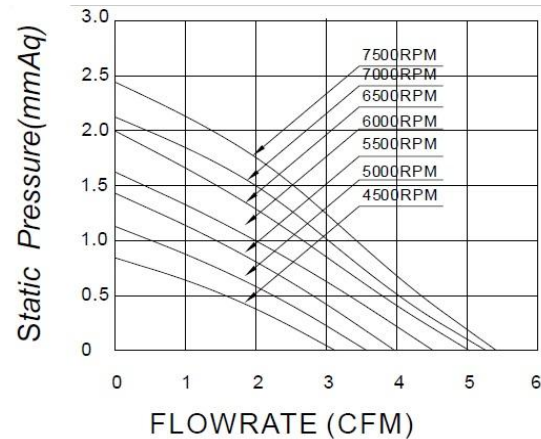

## DC Blower

18x18x4mm

- Housing: Aluminum
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD1804V3M-K	3.3	0.03	0.1	10000	0.14	0.004	3	0.12	19
BLD1804V5H-K	5	0.04	0.2	13000	0.2	0.006	6	0.24	21.7

## DC Blower


18x18x4mm

- Dimension:

Unit: mm

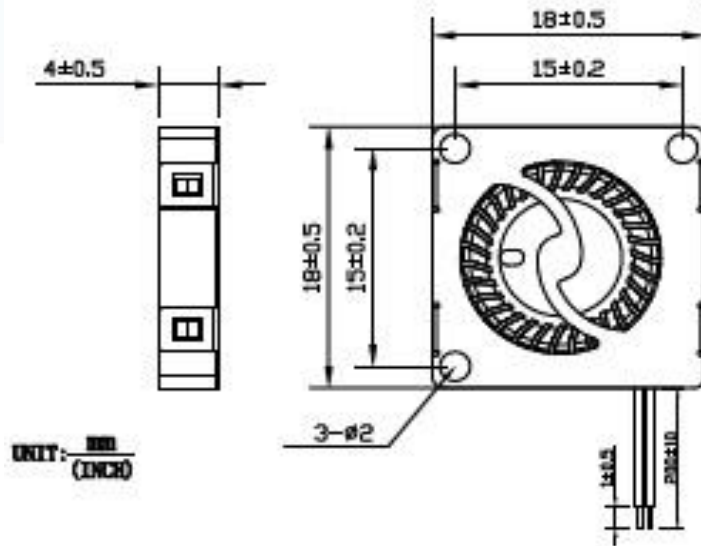

- Performance:

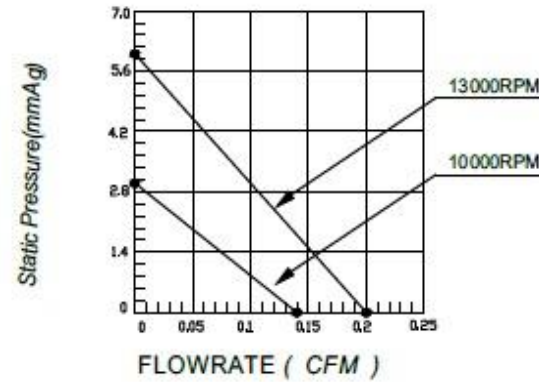

## DC Blower

20x20x6mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Sleeve
- Certification: CE, RoHS
- Additional functions are optional



Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD2006V5M-K	5	0.04	0.12	10000	0.21	0.006	1.21	0.047	18
BLD2006V12M-K	12	0.017	0.12	10000	0.21	0.006	1.21	0.047	18




# DC Blower


20x20x6mm

- Dimension:

Unit: mm

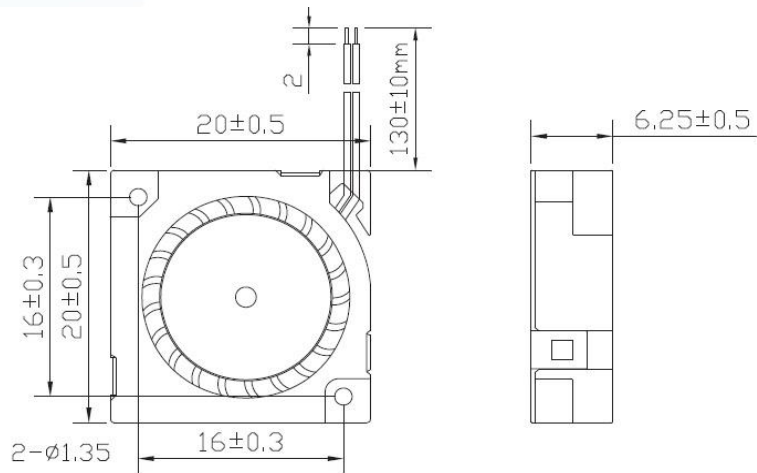

- Performance:

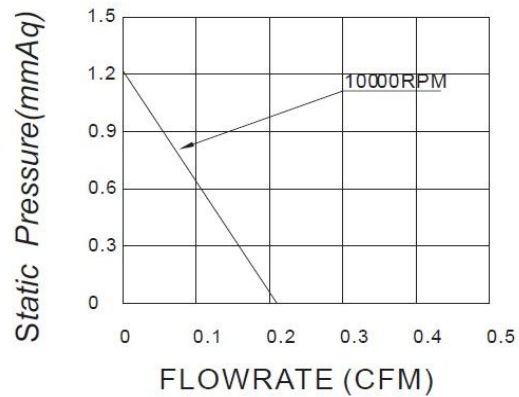

## DC Blower

20x26x8mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD2608V3L-K	3.3	0.03	0.1	7000	0.39	0.011	2.16	0.085	25
BLD2608V5L-K	5	0.075	0.38	9000	0.58	0.016	4.75	0.19	35

## DC Blower


20x26x8mm

- Dimension:

Unit: mm

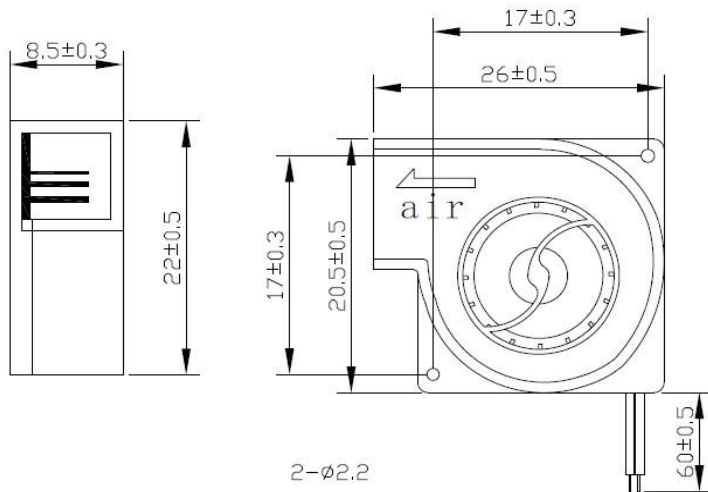

- Performance:

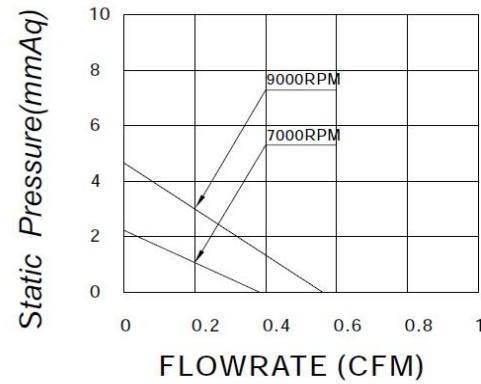

## DC Blower

30x30x4mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD3004V2LR-K	2	0.03	0.06	4300	0.26	0.007	1.16	0.046	18
BLD3004V3L-K	3	0.05	0.165	7000	0.39	0.011	3.05	0.12	18
BLD3004V5M-K	5	0.07	0.35	11000	0.73	0.021	9.57	0.376	28.6


# DC Blower

30x30x4mm

- Dimension:  
Unit: mm

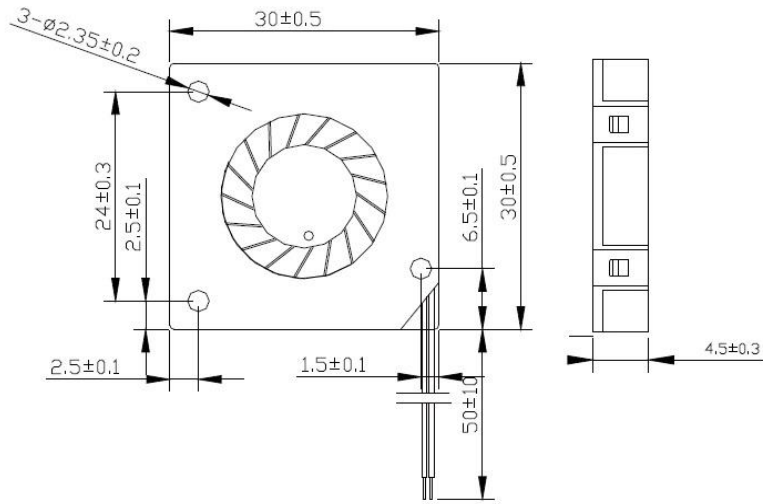

- Performance:

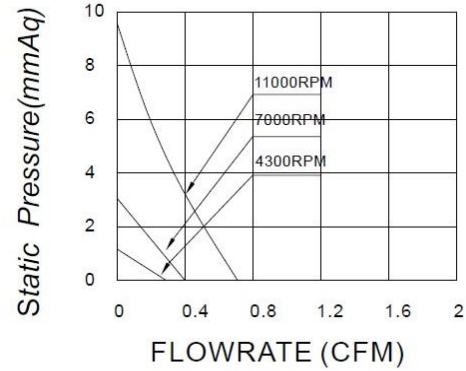

## DC Blower

35x35x7mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: Ball, Sleeve
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD3507V5LR-K	5	0.08	0.4	5000	0.84	0.024	4.08	0.161	23.9
BLD3507V5L-K	5	0.12	0.6	6000	1.11	0.031	5.92	0.233	27.2
BLD3507V5M-K	5	0.18	0.9	7500	1.39	0.039	9.84	0.387	32.3
BLD3507V12LR-K	12	0.033	0.4	5000	0.84	0.024	4.08	0.161	23.9
BLD3507V12L-K	12	0.05	0.6	6000	1.11	0.031	5.92	0.233	27.2
BLD3507V12M-K	12	0.075	0.9	7500	1.39	0.039	9.84	0.387	32.3

## DC Blower


35x35x7mm

- Dimension:

Unit: mm

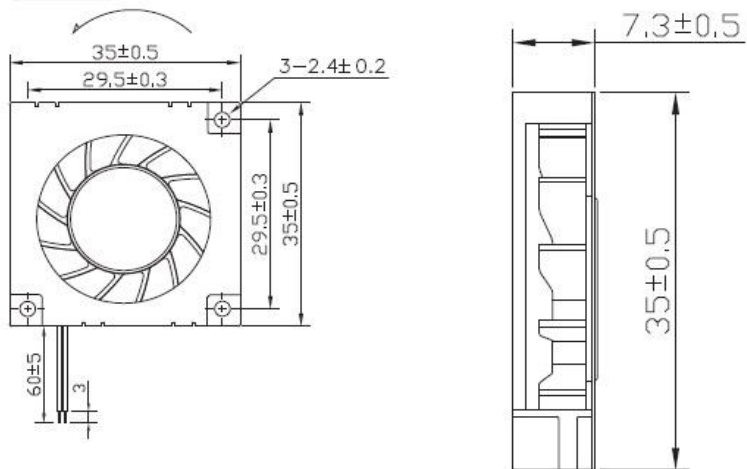

- Performance:

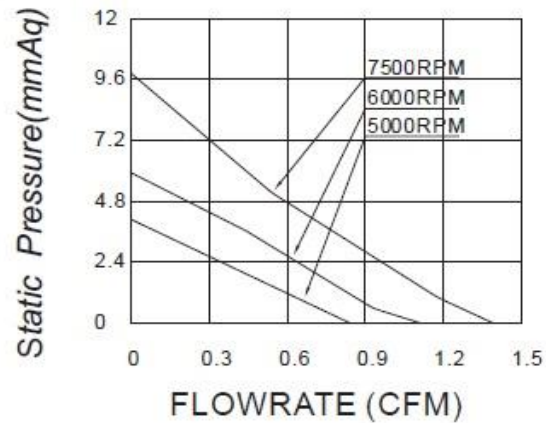

## DC Blower

55x49.5x5mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional



Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD5505V5M-PH	5	0.28	1.4	5200	2.2	0.062	10.6	0.417	32.8




## DC Blower

55x49.5x5mm

- Dimension:

Unit: mm

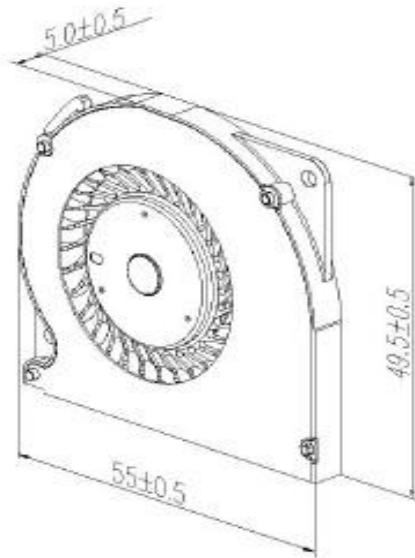

- Performance:



## DC Blower

55x51.4x4.8mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD5504V5H-PH	5	0.4	2	7400	2.68	0.075	19.9	0.776	42.8

## DC Blower


55x51.4x4.8mm

- Dimension:

Unit: mm

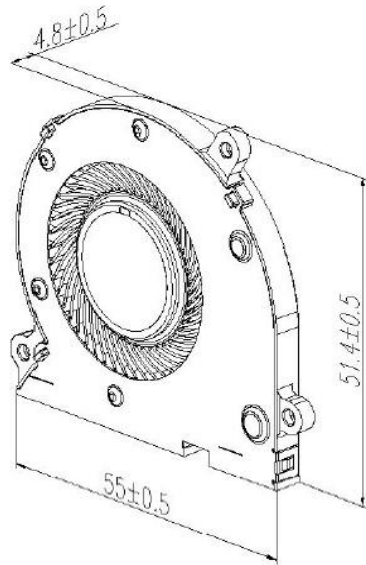

- Performance:

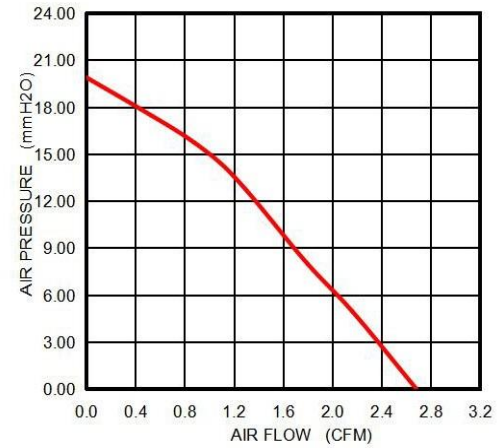

## DC Blower

56x46x7mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD5607V5M-PH	5	0.4	2	5600	3.19	0.09	13.85	0.545	37.2

## DC Blower


56x46x7mm

- Dimension:

Unit: mm

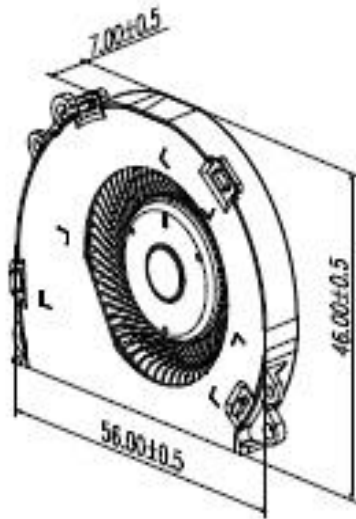

- Performance:

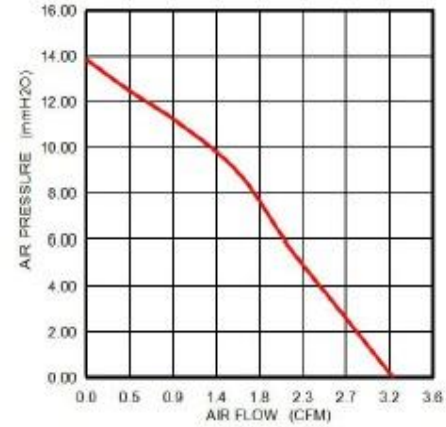

## DC Blower

56x50x5mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD5605V5M-PH	5	0.35	1.75	4800	1.82	0.051	11.4	0.449	29.5


## DC Blower

56x50x5mm

- Dimension:  
Unit: mm

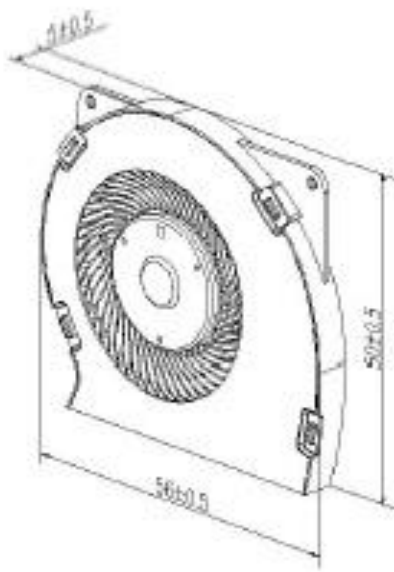

- Performance:

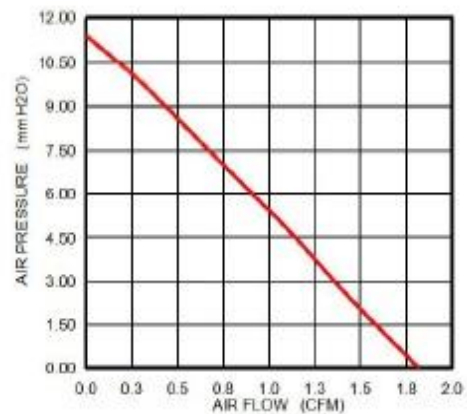

## DC Blower

56x50x5mm - B Type

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional



Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD5605V5M-PH2	5	0.35	1.75	4800	1.79	0.051	10.5	0.413	29.5




## DC Blower


56x50x5mm - B  
Type

- Dimension:

Unit: mm

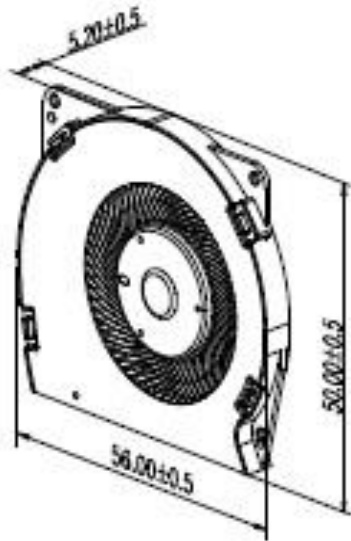

- Performance:

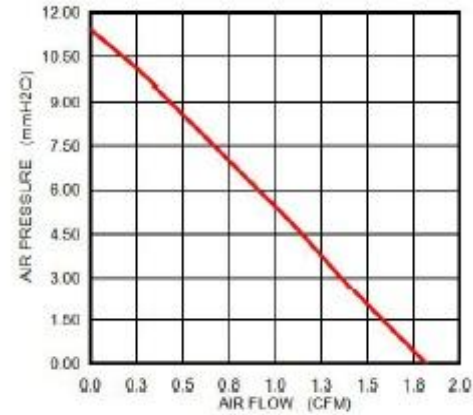

## DC Blower

56x53.6x7.2mm - B Type

- Housing: Thermoplastic PBT (UL94V-0) / SGCC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD5607V5L-PH2	5	0.22	1.1	4000	2.61	0.074	7.8	0.307	27.5

## DC Blower


56x53.6x7.2mm - B Type

- Dimension:

Unit: mm

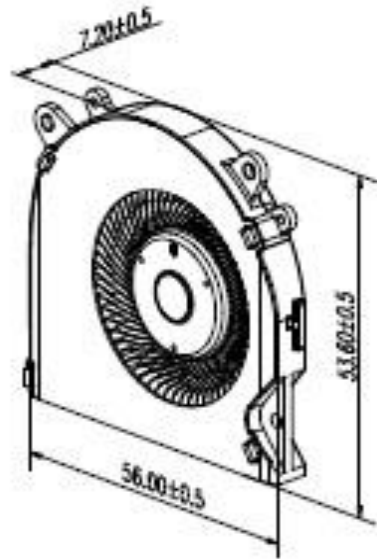

- Performance:

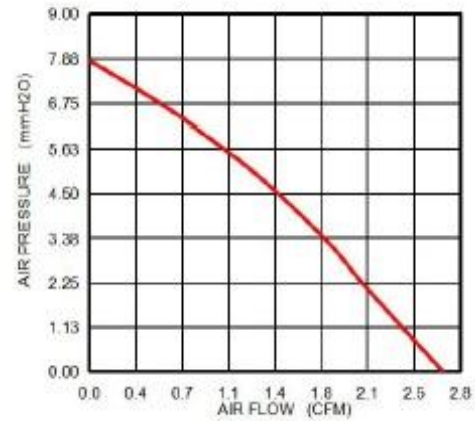

## DC Blower

59.3x55.6x5.6mm

- Housing: Thermoplastic PBT (UL94V-0) / SGCC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD5905V5M-PH	5	0.38	1.9	6700	3.4	0.095	18.34	0.715	41.1

## DC Blower


59.3x55.6x5.6mm

- Dimension:

Unit: mm

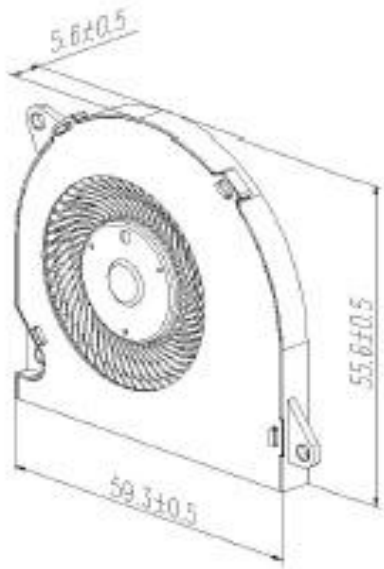


- Performance:

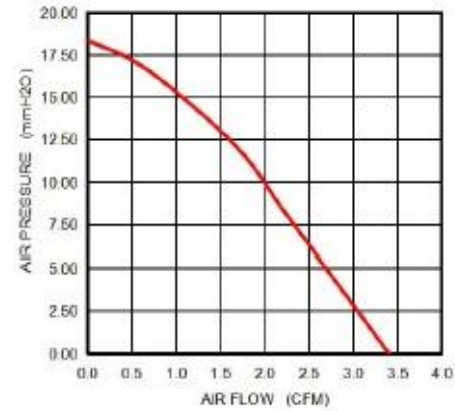

## DC Blower

63x63x4mm

- Housing: Thermoplastic PBT (UL94V-0) / SGCC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD6304V5M-PH	5	0.4	2	5700	2.15	0.06	14.5	0.566	35

## DC Blower


63x63x4mm

- Dimension:

Unit: mm

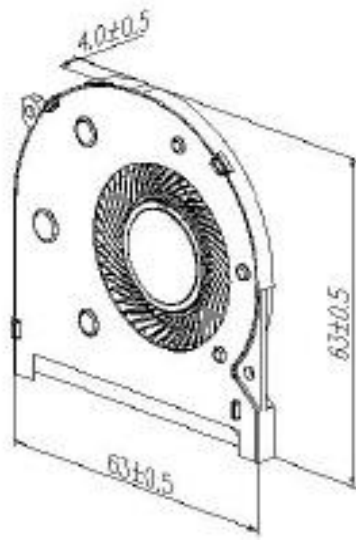

- Performance:

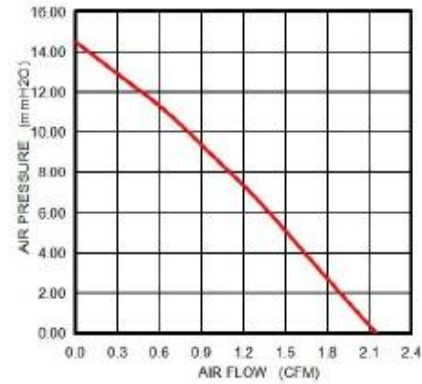

## DC Blower

63x58x7.5mm

- Housing: Thermoplastic PBT (UL94V-0) / SGCC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional



Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD6307V5M-PH	5	0.4	2	5100	5.06	0.142	16.75	0.653	37.8




## DC Blower


63x58x7.5mm

- Dimension:

Unit: mm

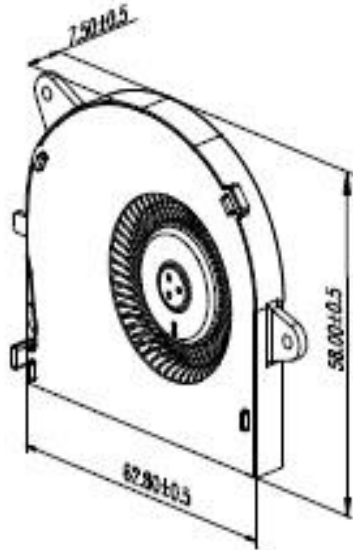

- Performance:

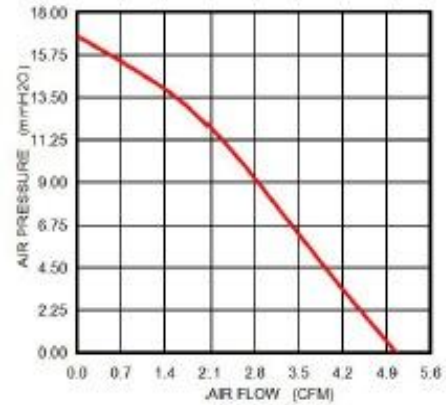

## DC Blower

67.8x59.5x5mm

- Housing: Thermoplastic PBT (UL94V-0) / SGCC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD6705V5M-PH	5	0.4	2	5200	3.68	0.103	17.1	0.667	38.1

## DC Blower


67.8x59.5x5mm

- Dimension:

Unit: mm

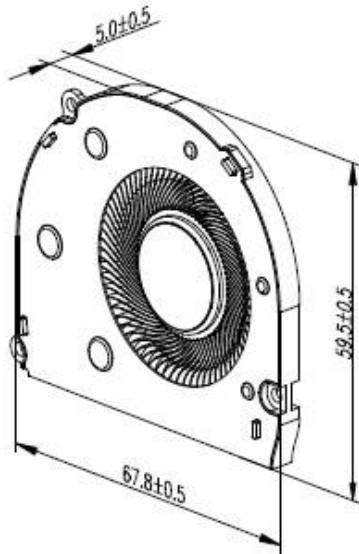


- Performance:

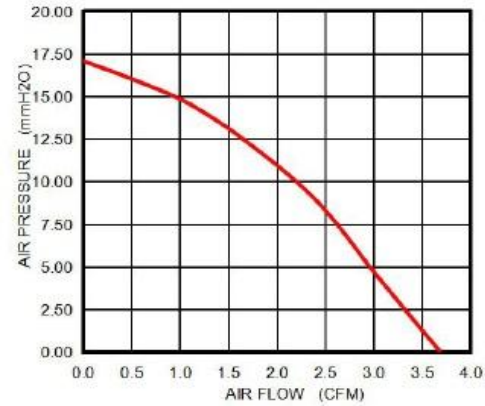

## DC Blower

70x64.3x8.5mm

- Housing: Thermoplastic PBT (UL94V-0) / SGCC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD7008V5L-PH	5	0.4	2	4350	4.74	0.133	12.57	0.495	35.1

## DC Blower


70x64.3x8.5mm

- Dimension:

Unit: mm

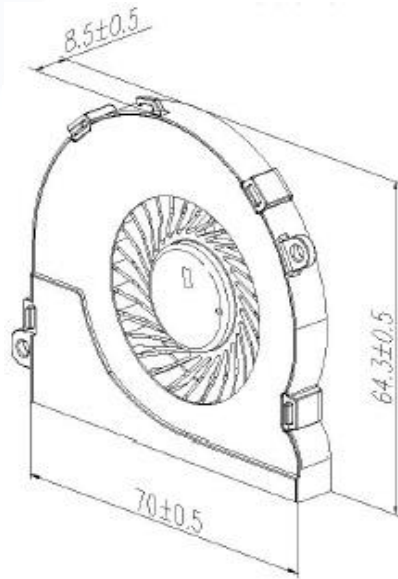

- Performance:

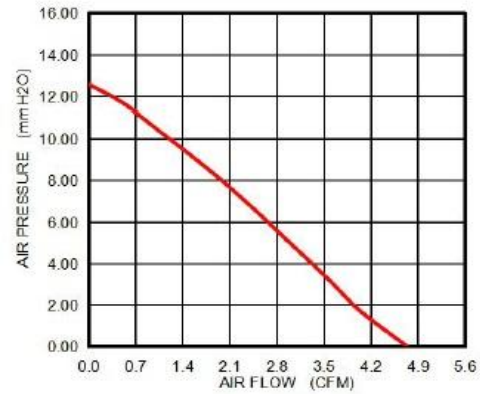

## DC Blower

75.7x72.7x3.5mm

- Housing: Thermoplastic PBT (UL94V-0)
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD7503V5M-PH	5	0.27	1.35	5200	2.1	0.059	10	0.39	30.6


## DC Blower

75.7x72.7x3.5mm

- Dimension:  
Unit: mm

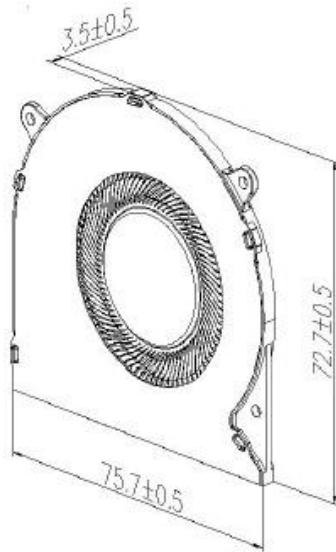

- Performance:

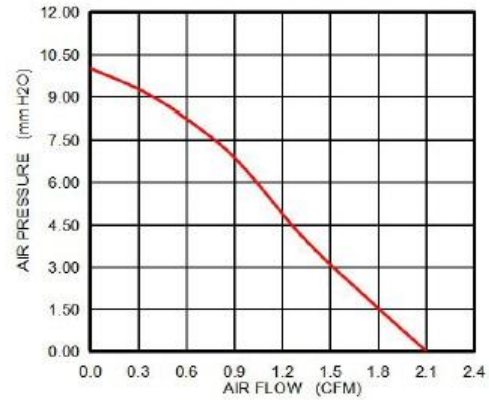

## DC Blower

75x72x5mm

- Housing: Thermoplastic PBT (UL94V-0) / SECC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional



Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD7505V5L-PH	5	0.45	2.25	4800	4.29	0.121	19.82	0.78	40.2




## DC Blower


75x72x5mm

- Dimension:

Unit: mm

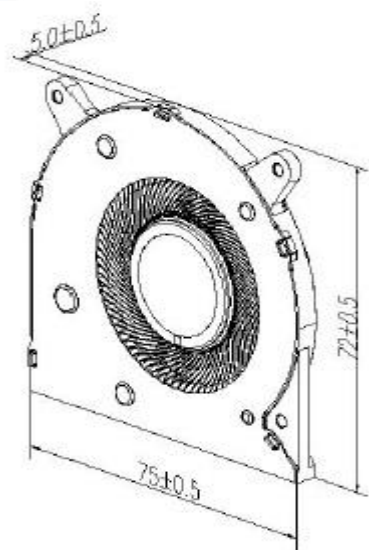

- Performance:

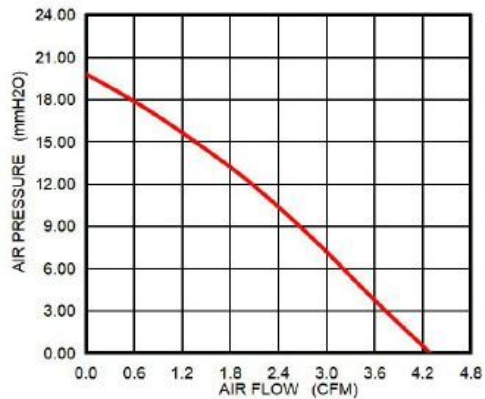

## DC Blower

74.5x72x7mm

- Housing: Thermoplastic PBT (UL94V-0) / SECC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD7407V5L-PH	5	0.45	2.25	4500	5.36	0.15	19.13	0.746	42.6

## DC Blower


74.5x72x7mm

- Dimension:

Unit: mm

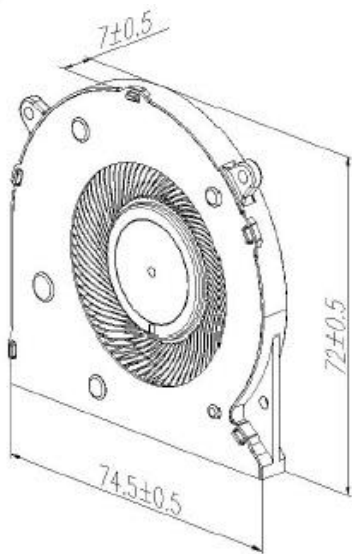

- Performance:

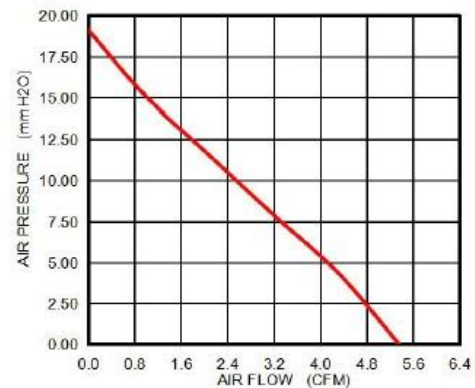

## DC Blower

79.3x69.8x5mm

- Housing: Thermoplastic PBT (UL94V-0) / SECC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD7905V5L-PH	5	0.4	2	4500	4.1	0.115	15	0.591	38.2

## DC Blower


79.3x69.8x5mm

- Dimension:

Unit: mm

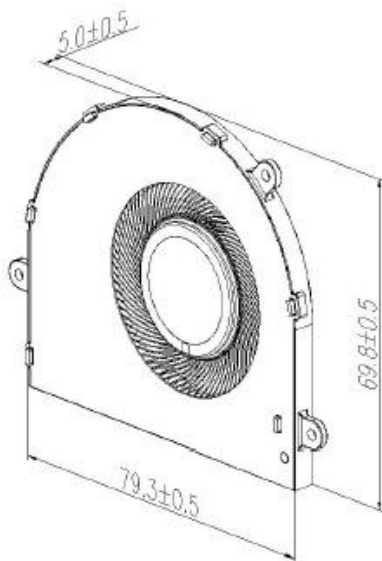


- Performance:

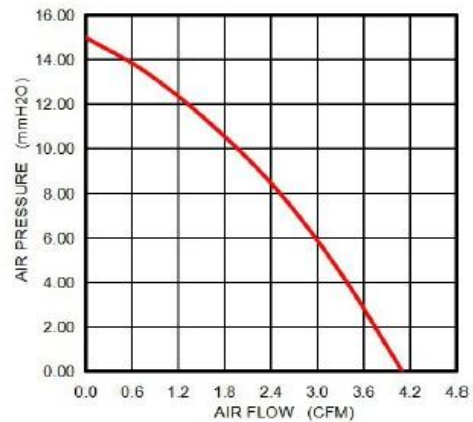

## DC Blower

80x74.5x7mm

- Housing: Thermoplastic PBT (UL94V-0) / SECC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD8007V12L-PH	12	0.3	3.6	4400	6.91	0.193	21.2	0.835	43.6

## DC Blower


80x74.5x7mm

- Dimension:

Unit: mm

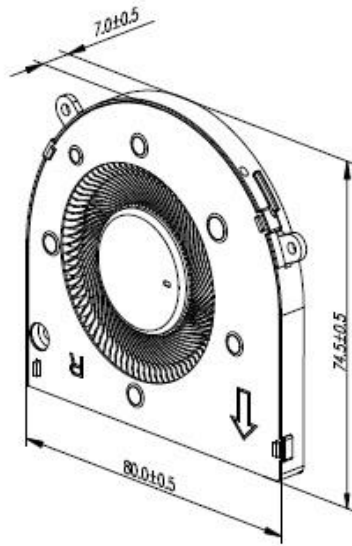


- Performance:

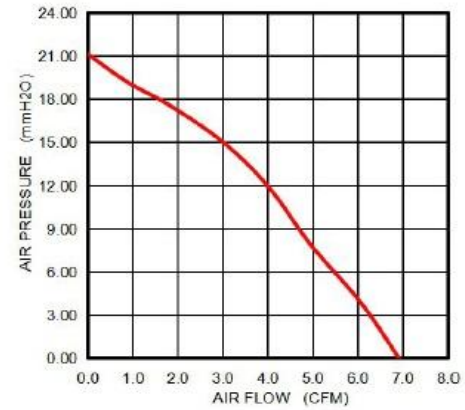

## DC Blower

95.4x75.5x5mm

- Housing: Thermoplastic PBT (UL94V-0) / SECC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional



Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD9505V5L-PH	5	0.45	2.25	4500	4.63	0.13	14.52	0.566	40.9




## DC Blower


95.4x75.5x5mm

- Dimension:

Unit: mm

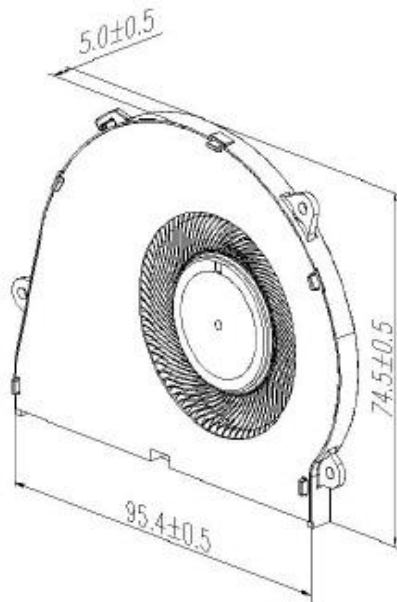

- Performance:

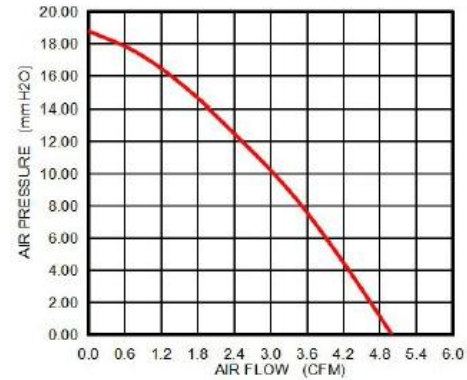

## DC Blower

95.4x74.5x5.5mm – B Type

- Housing: Thermoplastic PBT (UL94V-0) / SECC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD9505V5L-PH2	5	0.45	2.25	4500	5.7	0.16	15.87	0.619	41.9


## DC Blower

95.4x74.5x5.5mm - B  
Type

- Dimension:  
Unit: mm

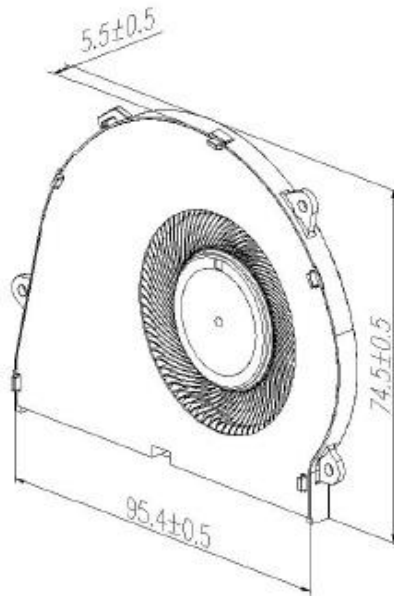

- Performance:

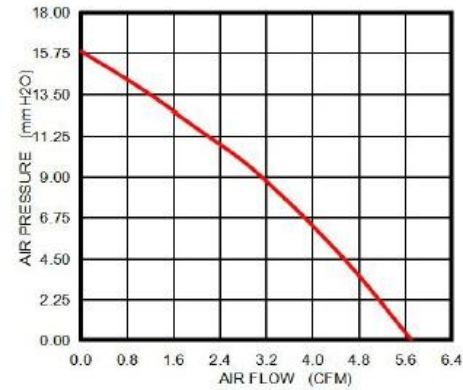

## DC Blower

95.8x76.5x6.2mm

- Housing: Thermoplastic PBT (UL94V-0) / SECC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD9506V5L-PH	5	0.45	2.25	4100	5.77	0.162	16.89	0.659	40.9

## DC Blower


95.8x76.5x6.2mm

- Dimension:

Unit: mm

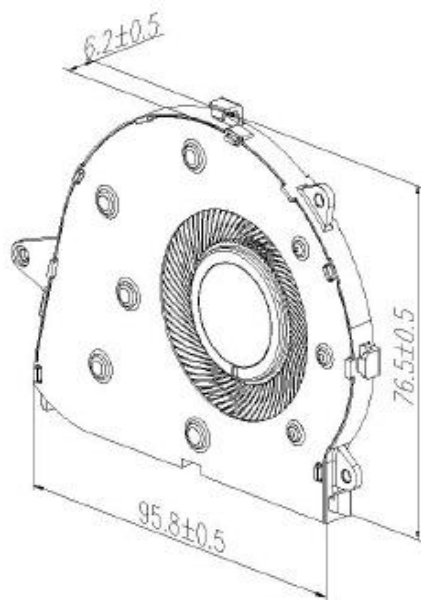

- Performance:

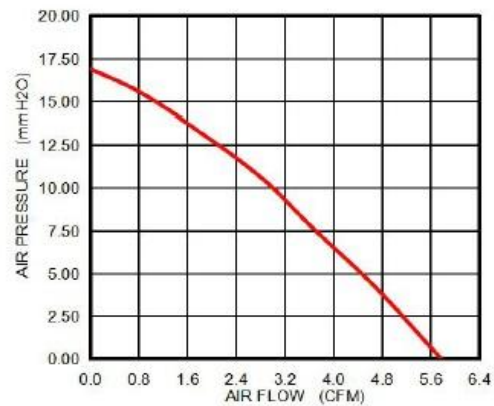

## DC Blower

101x94.4x5.5mm

- Housing: Thermoplastic PBT (UL94V-0) / SECC
- Impeller: Thermoplastic PBT (UL94V-0)
- Bearing: HBD
- Certification: CE, RoHS
- Additional functions are optional




Model	Voltage	Current	Power	Speed	Air Flow		Pressure		Noise
	VDC	Amp	Watt	RPM	CFM	m3/min	mmH2O	InH2O	dB(A)
BLD10105V5L-PH	5	0.3	1.5	2900	4.49	0.126	8.57	0.334	291

## DC Blower


101x94.4x5.5mm

- Dimension:

Unit: mm

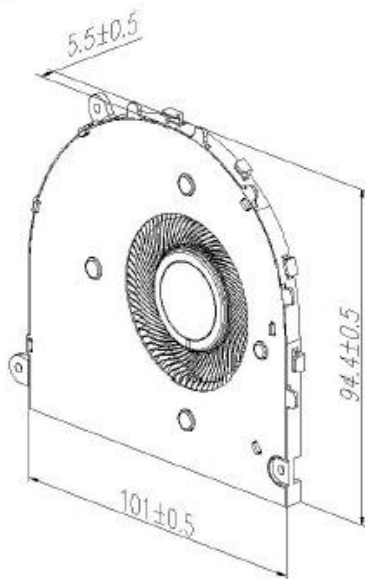

- Performance:

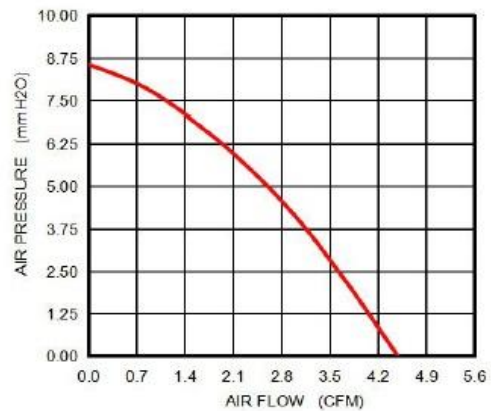



Change is a perpetual motion

**Phone:** +886-7-215-0001

**Mobile:** +886-938-016696

**E-mail:** [service@cainton.com](mailto:service@cainton.com)

Address: 9F.-1, No. 171,  
Bizhong St., Yancheng Dist.,  
Kaohsiung City 803002, Taiwan (R.O.C.)

**[www.cainton.com](http://www.cainton.com)**